

Gartec 2000 Platform Lift


GARTEC
LEADING THE PLATFORM LIFT INDUSTRY

TECHNICAL

Type of Lift	Internal platform lift for public and commercial environments
Useage	Passenger platform lift
Environment	Internal only
Travel	2,000mm - 13,000 mm
No. of Floors	2 - 6
Top Height	2420mm No head fixing required
Pit / Ramp	50mm (pit or ramp)
Rated Speed	0.15m/s
Capacity	420kg / 5 person
Drive System	Chain drive system with emergency battery backup
Platform Controls	Constant pressure operation
Landing Controls	Single Press Operation
Power Req.	Single Phase, 230V, 16A Type C Breaker (If with RCD, 100mA)
Motor	2.1kW
Shaft	Supplied, self supporting Steel sandwich panels or optional glass panels
Doors	Swing doors as standard 910mm opening width 2050mm opening height
Door Configuration	Doors on any of 3 sides at each floor (excl. COP side)
Compliance	EN81-41 ISO 9001:2008 Machinery Directive Compliant Part M Compliant

The Gartec 2000 is a simple, Swedish design passenger lift, ideal for access in almost any building. No head fixing, no machine room and quick installation using a modular system make the 2000 platform lift easy.

Create a stunning design in glass, or a subtle effect with RAL colours of your choice. Fully compliant, the 2000 offers passenger accessibility for commercial and public buildings.

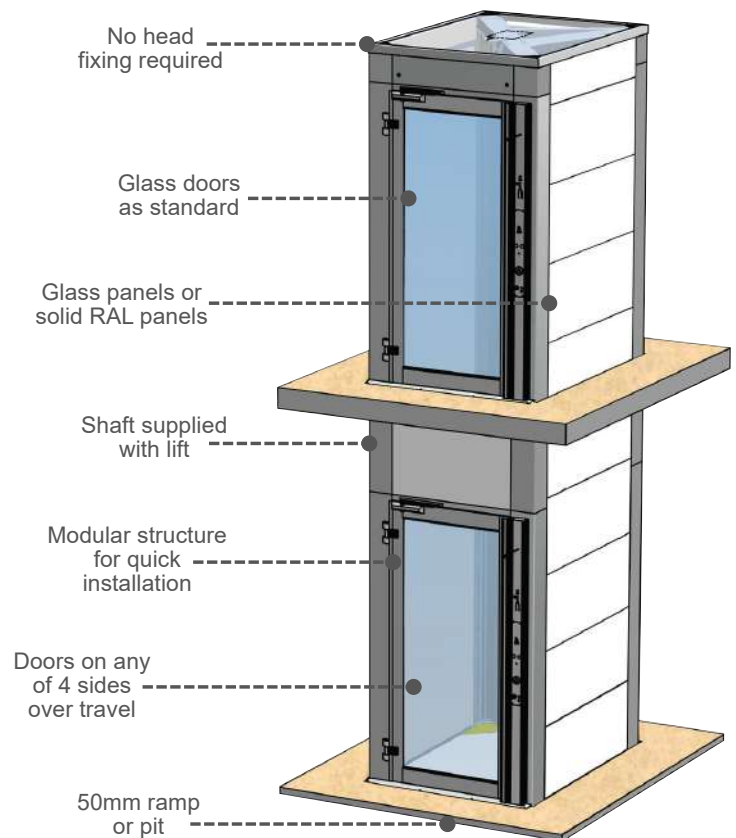

DIMENSIONS

Platform Size	Structural Opening	Shaft Size
1230 x 1520mm	1330 x 1630mm	1300 x 1600mm
1230 x 1620mm	1330 x 1730mm	1300 x 1700mm

What do you need?

From site visits to specific drawings, pre-contract meetings to handovers Gartec are experienced and ready to help however we can.



Platform lift in a retail environment

Gartec 2000 Platform Lift

STANDARD FEATURES



Doors	Glass panel swing door
Rails	Aluminium handrails & handles on platform and door
Communicate	Intercom as standard
Shaft	Self-supporting structure Steel sandwich panels in white as standard
Machinery	No separate machine room All machinery within footprint
Lighting	Ceiling mounted LED spotlights
Flooring	Vinyl grey flooring
Safety	Alarm button Emergency stop button Safety edges



Platform lift on mezzanine level

PLAN VIEWS

Site specific drawings will be provided

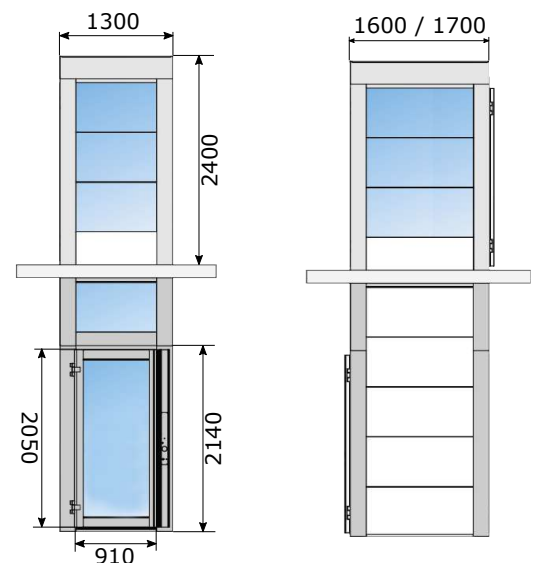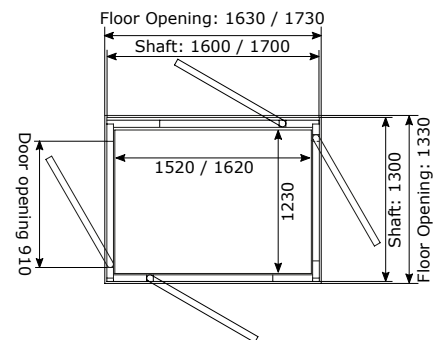

OPTIONAL EXTRAS

Doors	Restricted access locking Automatic door openers
Rails	Aluminium handrails & handles as standard
Communicate	Autodialler (pre-programmed with your choice of numbers)
Shaft	Glass panels to any of 4 walls RAL colour options for steel panels
Flooring	Bespoke flooring (client supply)

