

Introducing the Gartec Mezz Lift

GARTEC
LEADING THE PLATFORM LIFT INDUSTRY

TECHNICAL

Type of Lift	Goods only lift for commercial environments
Useage	Goods only lift
Environment	Internal
Travel	2,146mm to 4,096mm
No. of Stops	2
Top Height	2,200mm
Capacity	Max. 1,000kg
Ramp	1200mm x 935mm
Rated Speed	0.2m/s
Drive System	Electric chain drive system
Power Supply	3.4kW, 400V
Controls	Call and Send
Shaft	Free standing structure clad in perforated sheet metal No shaft required
Doors	Single leaf door Perforated sheet metal 1250mm x 2000mm
Door Configuration	Single entry or through car door configuration
Safety	Electrical interlock on gate PAWL locking on door & platform Emergency stop button Busy light
Compliance	EN 2006/42/EC

An ideal mezzanine system for small goods transport, the Mezz Lift carries up to 1,000kg over 2 floors.



KEY FEATURES

- Freestanding shaft structure
- Machine room less (MRL)
- No shaft or pit required
- Up to 1,000kg capacity
- 1 week installation
- Door and platform locking system - safe to enter for loading
- Control box - no machine room
- Galvanised steel platform railing


Keeping you Safe

Gartec are accredited for various health and safety schemes, including CHAS, SMAS, Achilles and OHSAS 18001, to give you peace of mind.




Gartec Mezz Lift Plans & Dimensions

PLATFORM

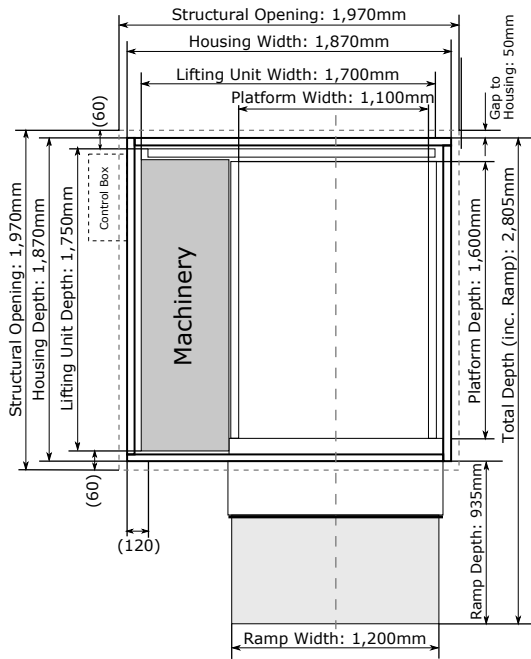

SHAFT

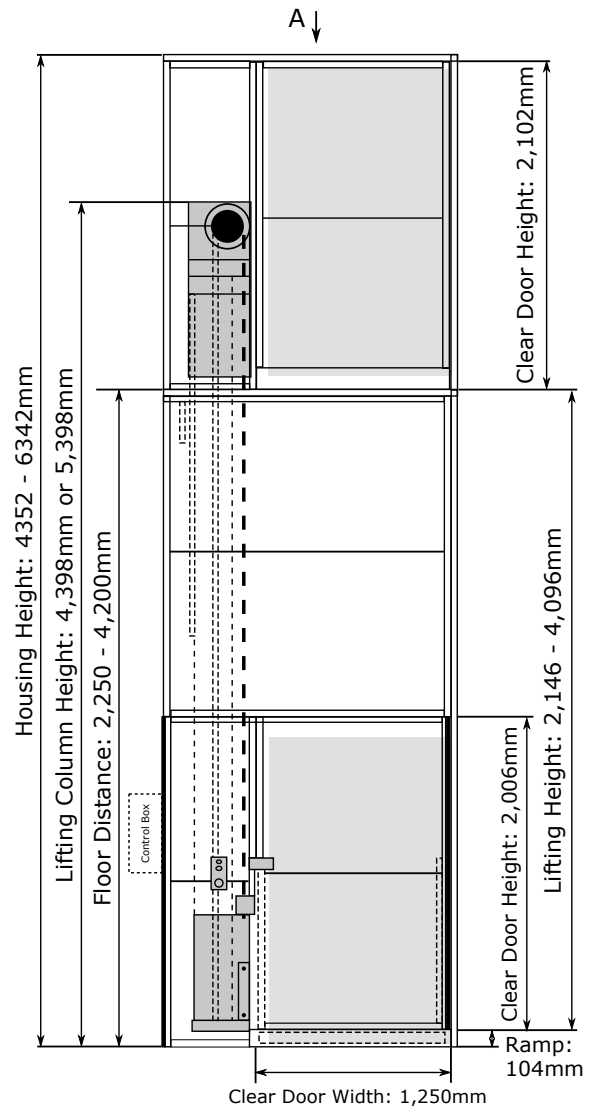

DIMENSIONS

	Width	Depth	Height
Platform	1,100mm	1,600mm	
External Shaft	1,870mm	1,870mm	
Mezzanine Shaft	1,970mm	1,970mm	
Door	1,250mm		2,000mm
Ramp	1,200mm	935mm	

The Mezz Lift comes as standard with a perforated, galvanised sheet metal shaft, which can be clad by the user or left as it is to keep costs low.

Did you know...

Gartec provide a full turnkey service, from site visits and meetings to pre-install checks, installation, LOLER and commissioning. Let us do the hard work for you.

