

GARTEC HOME PLATFORM LIFTS

Gartec 4000

GARTEC LIFTS
DESIGNED
HOME FOR LIFE



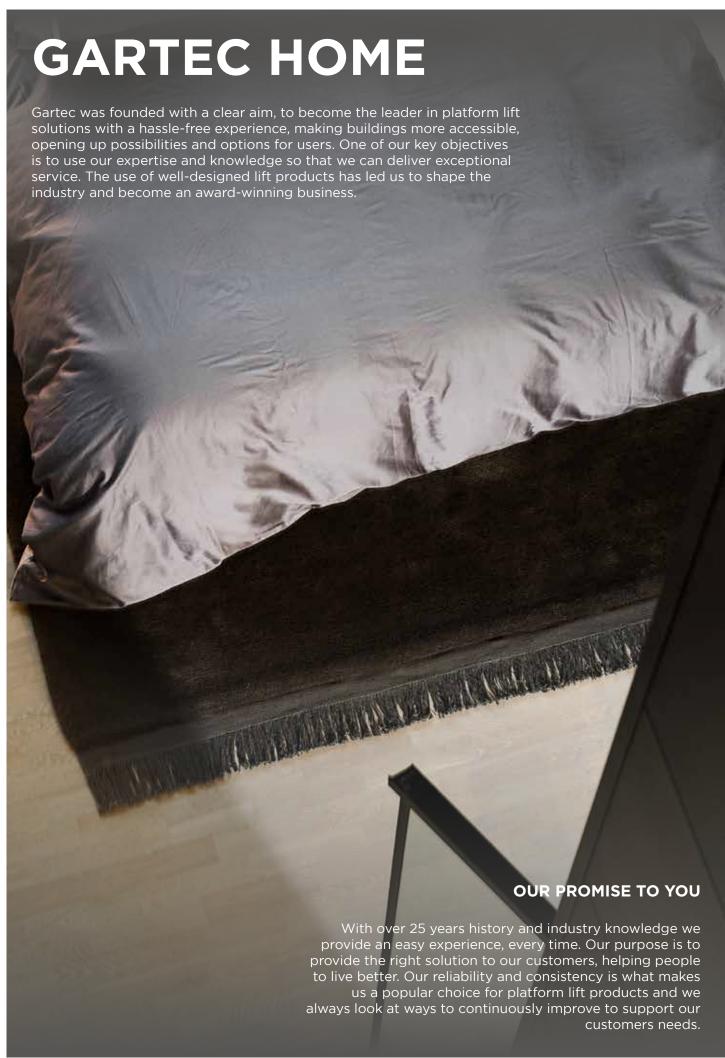

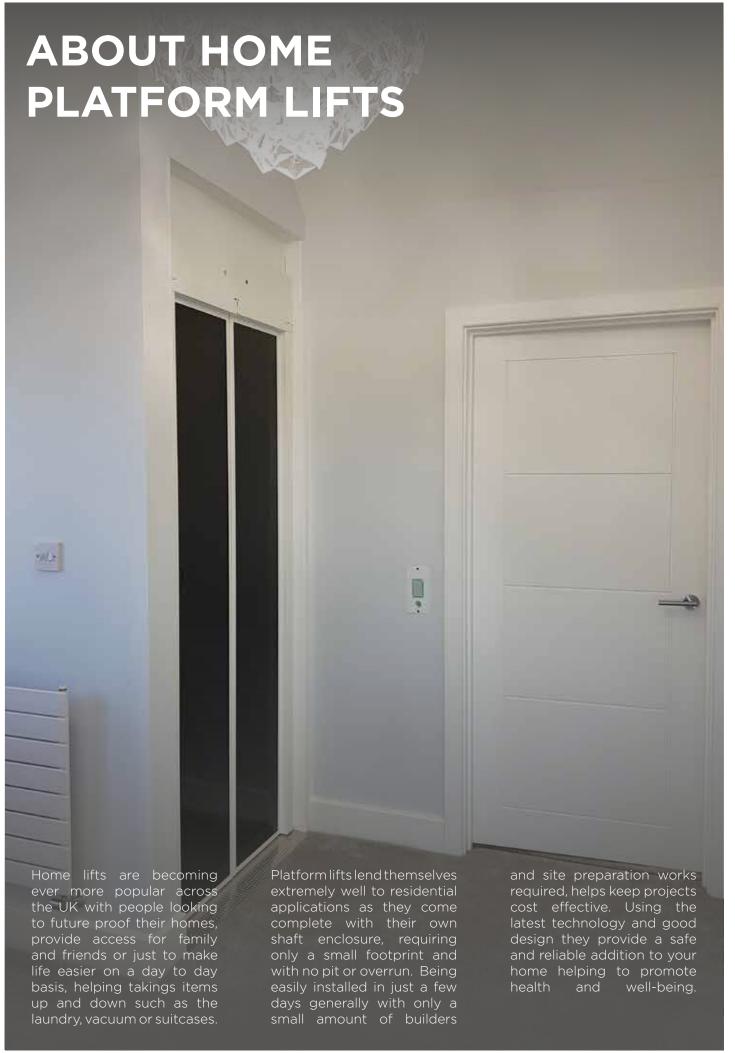





FEATURES

- Three lift sizes (see page 12)
- Shaft enclosure supplied with lift
- Glazed or solid shaft panels
- Doors on up to 3 different sides
- Single or double glass doors available
- Safety edges around platform
- 50mm pit or ramp
- Integral electrical cabinet

BENEFITS

- Optimal design and size with a wide range of finishes
- Made using up to 95% recyclable materials
- Energy efficient (low power usage)
- Patented screw/nut technology
- Low maintenance and operating costs
- Minimal building work & quick installation
- Self-contained unit (no separate machine room)





CONTROL PANEL BUTTONS

Large buttons with text / numbers and braille.

EMERGENCY STOP BUTTON

An emergency stop button is fitted for emergency situations. The light will indicate if pressed down.

ALARM BUTTON

The alarm button can be used in emergencies, this can be connected to an external alarm sounder or autodialer (optional) for additional safety.

EXTERNAL ALARM SOUNDER

When the alarm button is pressed the external alarm sounder (optional) will give a loud signal outside the lift

KEY SWITCH ON PLATFORM

An optional key switch can be located on the control panel will lock the platform buttons prohibiting unauthorized use, this can be connected to either all destination buttons or to only one destination button.

TELEPHONE / AUTODIALLER

A means of communication is required from inside the lift. As standard a telephone handset is fitted on the platform below the control panel and is connected to the landline coming into the property. Any number can be dialled.

The autodialler is integrated in the control panel and also connects to the land line, it can be preprogrammed with up to 5 numbers. By pressing the alarm button for 10 seconds it will call out to the programmed numbers. When unanswered, the next number is called. If a landline is not available a GSM unit can be supplied for both options (sim by client).

LANDING INDICATOR

An optional digital display positioned at the control panel shows the floor the lift is on. Here additional safety information can be displayed such as, battery warnings, a bell when the alarm button has been pressed, number of starts and total run time since installation, a weight symbol, and a fire symbol when connected to the buildings fire alarm (optional).





ABOUT We have a wide range of options and features available to suit your home, from buttons and different doors, to colours and floor finishes. With over 25 years of history, we have worked with hundreds of companies and homeowners finding the right lift solution that's perfect for each project, matching our lifts to brand colours or colour schemes, and finishes to compliment the building, we have a lift for every home and options and additions for you to choose from below.

DOOR CONTROL



LANDING CALL STATION

Standard call button either flush or surface mounted. Allows the user to call the lift whilst away from the doors. Back light in red and green for arrival indication.



AUTOMATIC DOOR OPENER

Press the button on the landing call station and the lift door opens. Internal on the GL and Double doors and externally mounted on the Fire door.



KEY LOCKING

A key can be used to call and use the lift instead of a button to restrict access. The doors lock 10 seconds after closing.



FAAC DOOR OPENER

THRESHOLD AND RAMP

Externally mounted on the door it opens and closes the door automatically. Integral sensors detect obstructions and reverse the door motion.



PUSH BUTTON & KEY SWITCH

The key can be used to lock on/off the call button preventing unauthorised use.





DOUBLE HINGED DOORS

glass areas.

Double swing glass & steel door with concealed automatic opener /closer and aluminium trim to glass areas.

concealed closer and aluminium trim to




ACCESS

For all lifts without a 50mm pit a door threshold in oak is delivered with the lift. A ramp can be supplied for easier access to the lift.

The ramp is made of galvanized steel and painted in RAL 9016 (Traffic white). If the shaft is painted in another RAL colour the ramp will be painted in the same colour. It is also possible to order the threshold and ramp with a corrugated aluminium finish.



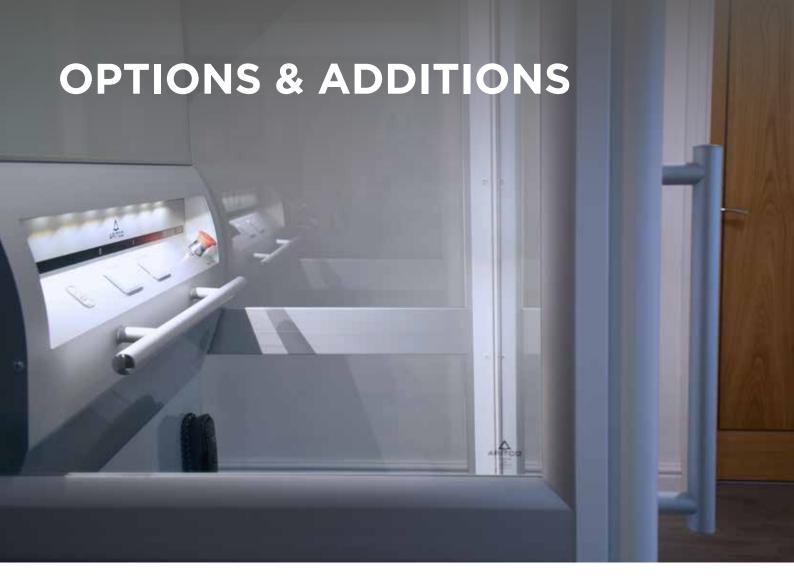

WALLS & SHAFT



GLAZING TINTS (DOORS & SHAFT)

For doors and shaft, clear glass (JT0) comes as standard, or optional tinted glass (JT16) can be selected.



SHAFT PANEL COLOURS

Shaft panels are painted in 9016 (Traffic White) as standard. The common range shown to the right can be applied to shaft panels, console wall, door blades and door frames.

LIFT PARTIALLY PAINTED IN DIFFERENT COLOURS:



- Lift walls/Shaft in one colour.
- All door blades in one colour.
- All door frames in one colour (Also includes the door faceplate.)
- Panels under the destination panel in one colour.
- One of the above choices or a combination of them.

OPTIONAL RAL COLOUR RANGE

The lift comes painted in Traffic White RAL 9016 as standard. As an optional extra the walls, doors and console can all be selected from one of the common colours below. On request the 213 colours from the RAL K7 Classic chart can be selected.

Traffic white RAL 9016 *STANDARD COLOUR	Pure white RAL 9010	Grey white RAL 9002
Oyster white RAL 1013	White aluminium RAL 9006	Light ivory RAL 1015
Telegrey 1 RAL 7045	Moss green RAL 6005	Anthracite grey RAL 7016
Brown red RAL 3011	Jet Black RAL 9005	PLEASE NOTE: The actual colour of the lift may differ from the colour samples pictured.





PLATFORM



FULL HEIGHT CONSOLE WITH MIRROR

Full height panel houses controls, large mirror, LED lighting, handrail and safety edge. The panel under the destination panel and the small roof over the mirror is painted in RAL 7042 (grey) as standard, but can be painted in any RAL colour as an option.



FOOTBOX

As an option a console panel with a recess can be ordered for the bottom part of the platform. The recess adds extra depth (80mm).

LIGHTING



LED LIGHTING

LED strip lightening is fitted on the console above the mirror and control panel buttons.

FLOORING

Choose from the following options for vinyl (standard), rubber and aluminium (optional) flooring. It is possible to order the lift without a flooring which enables you to put in your own flooring (maximum thickness of an externally selected floor is 3mm). **PLEASE NOTE:** Aluminium flooring is not available for platform size 900 x 1040mm.





















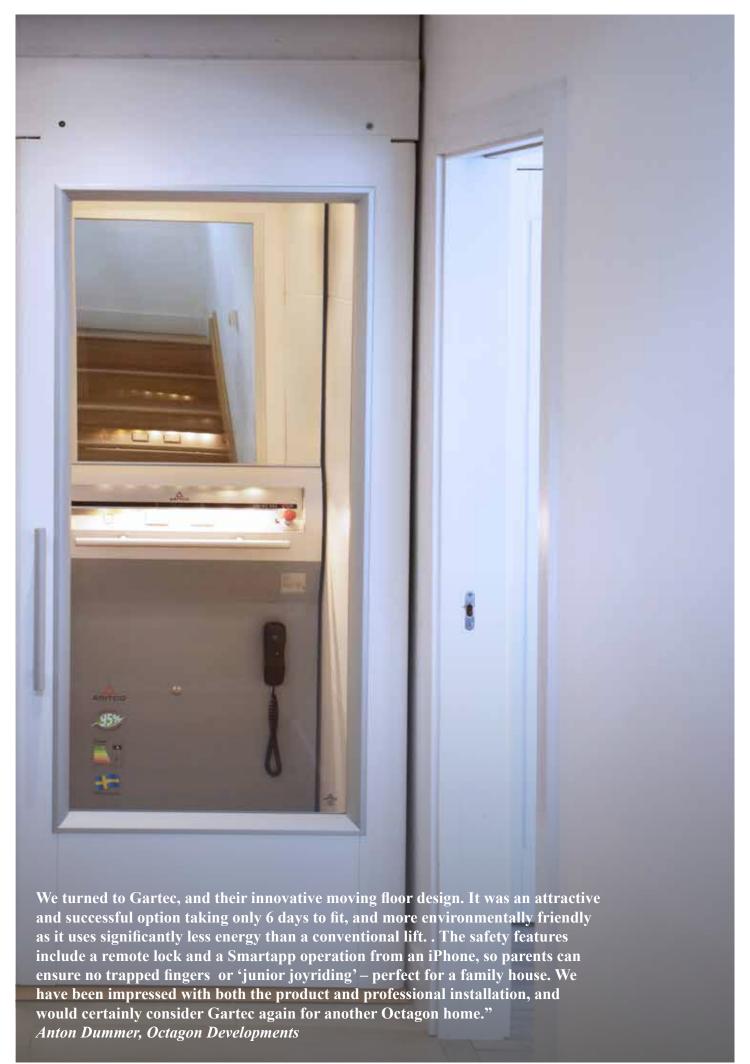


DIMENSIONS

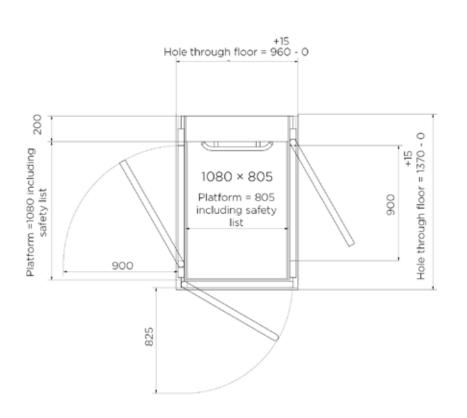

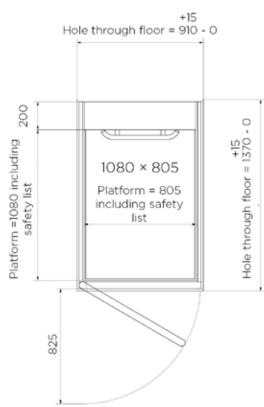

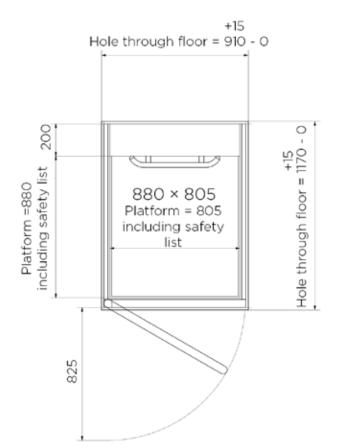

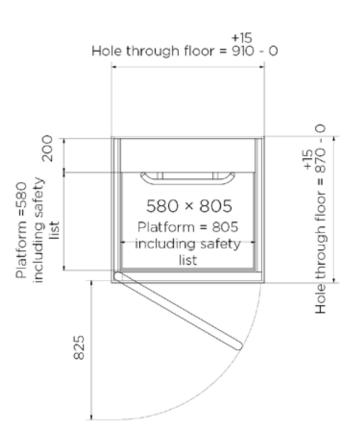

TECHNICAL DETAILS

Type of Lift	Passenger & light goods enclosed platform lift intended for use in residential environments	
Compliance	European Machine directive 2006/42/EC European standard EN 81-41	
Drive System	Patented screw/nut system	
Rated Speed	Max 0,15m/s	
Travel Height	250mm - 13,000mm	
No. Floors	2-6	
No. Doors per floor	Max. 2 doors per floor	
Pit / Ramp	50 mm (no pit is required when there is a ramp)	
Entry	One, two or three sides	
Top Height	2300mm	
Platform Controls	Hold to run, the destination button must be kept pressed down during the whole ride	
Landing Controls	One touch call, single press operation	
Environment	Internal	
Emergency Lowering	Battery operated emergency lowering	
Control Voltage	24V	
Motor	1.1kW	
Door Locking system	Electrically operated deadlock	
Power Supply	1-phase 230V 50 Hz 20 A type C MCB	
Rated Load	250 kg	
Enclosure	Solid panels or glass (optional)	
Doors	GL Full height door as standard or double doors optional	

DIMENSIONS

Platform Size	Rated Load	Structural Opening*
805 x500mm	250KG	910 x 870mm
805 x 880mm	250KG	910 x 1170mm
805 x 1080mm	250KG	960 x 1370mm



HOW THE LIFT WORKS

Platform lifts are a simple and safe way to travel between floors. Gartec Home lifts are completely contained within their own shaft. They operate using our patented screw and nut technology driving the platform with a reliable, quiet & efficient motor. Two guide rails run from top to bottom on the back of the lift. The platform is connected to the guide rails ensuring a smooth ride is provided. There is no requirement for hydraulic oil, a pump box or a separate machine room which can make it a more cost effective solution.

EMERGENCY BATTERY LOWERING

A secondary motor is fitted to the lift and connected to a battery. In the event of a power failure the lift switches to battery operation and allows the user to return to the floor below and exit the lift without any external assistance. From outside the lift it can be driven up or down via the small external control box.

SCREW & NUT TECHNOLOGY



Our patented screw and nut technology drives the lift up and down. A threaded bar runs up the back of the platform to the top of the shaft and a nut which is attached to the platform, is driven up and down by a quiet and reliable motor.

Automatic lubrication of the screw is included as standard. It is connected to a sensor and timer, so an indicator advises when levels are running low.



PLATFORM & TRAVEL

The platform that you stand on and the console wall are the only parts that move as you travel up and down. The walls are static, and you see these move past as you travel. To start moving, you hold down the button on the control panel. When you let go, the lift stops moving, meaning you can change direction mid-travel. Around the perimeter of the platform is a safety edge which stops the lift from moving when pressed down due to an obstruction.

